




## 1080P WDR BULLET CAMERA

# Ariel™ Full HD Bullet

The Ariel™ CB-3102 camera features FULL HD 1080p video that guarantees frame rates in high motion, complex and low light scenes, and lowers overall utility costs and carbon footprint. The Ariel CB-3102 delivers predictable storage, reducing the Total Cost of Ownership. The camera easily handles wide variations in motion and lighting found in airports, city surveillance projects, critical infrastructure sites, commercial offices and campuses.

[www.flir.com/security](http://www.flir.com/security)

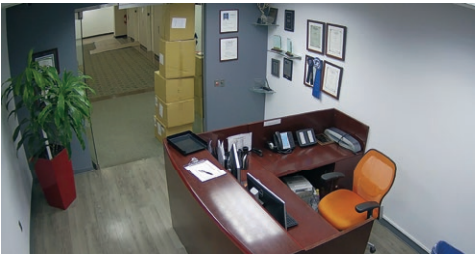

### MULTI-STREAM H.264 VIDEO

Crisp, clean video for supreme identification.



### GUARANTEED FRAME RATES

Maintains evidentiary integrity of video in challenging surveillance conditions, regardless of motion/scene complexity.



### PREDICTABLE STORAGE

With special motion processing software, the camera delivers predictable storage for reduced Total Cost of Ownership.

## SPECIFICATIONS

Camera	
Image Sensor	1/2.8" BSI CMOS
Sensor Resolution	2048 x 1536
Scanning Mode	Progressive
Sensitivity	0.03 (color)/0.01 (BW), 0 Lux with IR illuminator ON, measured at 30 IRE
Lens Type	CB-3102-01-I: Fixed 2.8mm, 102° HFOV, F1.8, D/N CB-3102-11-I: Varifocal 3-10mm, 27°-92° HFOV, F1.4, D/N, Motorized with auto-focus and auto-iris
Automatic Electronic Shutter (AES)	1/7.5 to 1/10,000 (auto)
Digital Slow Shutter (DSS)	1/7.5 to 1/50 or 1/60 with up to 8x sensitivity boost in color or night mode
White Balance	Auto / ATW / Manual / One Push
Automatic Gain Control (AGC)	Auto
Back Light Compensation	On / Off
Wide Dynamic Range (WDR)	On / Off - 3 levels
Noise Reduction	3D
Tamper Detection	Yes
Privacy Zones	Yes
Video Motion Detection	Yes
Day / Night Mode	Yes
Mechanical IR Cut Filter	Yes
Signal to Noise Ratio (SNR)	±50 dB
Video	
Compression	Fully compliant multi-stream H.264 main/high profile + MJPEG
Maximum Performance	H.264 30/25 @ 1080p + 720p + D1 (NTSC/PAL)
Resolution Range	Scalable from D1 to FHD 1080p
Bandwidth	Configurable between 64Kbps and 20Mbps
Rate Control	CVBR
SD Card Recording <sup>1</sup>	microSDXC up to 128GB (Class 10)
IR Illuminator	
Distance	up to 30m (98 ft.)
Angle of Illumination	Full 60°
LED Type	High efficiency SMD
Peak Emission Wavelength (nm)	850

<sup>1</sup> Excluding countries where disallowed <sup>2</sup> Startup temperature -10°C/12°F

### Camera Ordering Information

Type	Series	Camera Resolution	Lens Options	Environmental	IR Illuminator
CB	31	02	x	1	I
Bullet Camera	31 = Ariel Gen II	02 = 1080p FHD	0 = 2.8mm 1 = 3-10mm	1 = IP67 Vandal with Heater	I = 60° Illuminator

Specifications are subject to change without notice.  
For the most up-to-date specs, go to [www.flir.com](http://www.flir.com)

Network	
Network Protocols	TCP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv4, IPv6, SSL, LDAP
Ethernet	10/100, auto sensing, half / full duplex (RJ45)
Remote Configuration	via web browser or supported video management software
Firmware Upgrade	Flash memory for upgrade of camera firmware over the network
Supported Web Browser	Internet Explorer 10+
Security	User account with password protection and IP filter
Audio	
Input	CB-3102-11-I: G.711, AAC 8KHz 16bit
Alarm	
Input	CB-3102-11-I: 1 dry alarm contact
Physical	
Enclosure	Indoor/Outdoor: IK7 rated vandal IP67
Dimensions	CB-3102-01-I: 180 x 86 x 80 mm (7.08 x 3.39 x 3.15 in.) CB-3102-11-I: 215 x 86 x 80 mm (8.48 x 3.39 x 3.15 in.)
Unit Weight	CB-3102-01-I: 0.45kg (0.98 lbs.) CB-3102-11-I: 0.675kg (1.49 lbs.)
Mechanical	
Pan / Tilt / Rotate	360, ±80° and 360
Electrical	
Input Voltage	802.3af PoE
Power Consumption	CB-3102-01-I: 5W / 9W with heater and IR CB-3102-11-I: 8W / 12W with heater and IR
Power Connector	PoE
Environmental	
Operating Temperature <sup>2</sup>	-40°C to 50°C (-40°F to 122°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	90% (non-condensing)
Warranty & Regulatory	
Warranty	According to FLIR RMA Policy and Process Notice document
USA	UL, FCC Part 15 (subpart B, class A)
International	CE marked, EN55022-1998 class A, EN55024, RoHS

### Accessories

A complete list of mounts, brackets, pole mounts and recess kits for cameras can be found in the FLIR Price List and Camera Accessory Guide.



#### CORPORATE HEADQUARTERS

27700 SW Parkway Ave.  
Wilsonville, OR 97070  
PH: +1 877.773.3547

#### FLIR SECURITY SYSTEMS, INC.

65 Challenger Rd, Suite 201  
Ridgefield Park, NJ 07660  
PH: +1 201.368.9700

#### FLIR UK

7 Lancaster Court  
High Wycombe, HP 123td  
PH + 44 (0) 1494.430248  
F + 44 (0) 1494.446928

#### FLIR MEXICO

Felipe Villanueva 10  
Guadalupe Inn,  
Alvaro Obregon, 01020  
PH: +52 55.55805618  
Email: info.cala@flir.com

[www.flir.com](http://www.flir.com)  
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2019 FLIR Systems, Inc. All rights reserved. 03/25/19

19-0582-SEC-ENT Ariel CB-3102 Bullet Datasheet



The World's Sixth Sense®