


High Flex Cat5e Cable

ACC-01-2100

General Specifications	
Length	5m
Connectors	1x RJ-45, 1x RJ-45 horizontal locking screws
Transfer Rate	1000 Mbps
Flex Cycles	1 million cycles on HN 120/0.5
Bend Radius	35 mm
Material	Heat-proof PUL
Diameter	7.5 mm
Color	Black
Warranty	1 year
Temperature	80° C Maximum
Compliance	RoHS

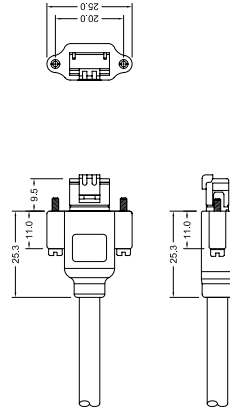


Camera-end screw lock connection

Gigabit Ethernet PCIe Card

ACC-01-1100

General Specifications	
Chipset	Intel PRO 1000CT (82574L)
Bus type	PCI Express 1.1 (2.5 GT/s)
Bus width	x1 lane PCI Express operable in x1, x4, x8, x16 slots
Hardware certifications	FCC B, UL, CE, VCCI, BSMI, CTICK, MIC
Controller-processor	Intel® 82574L
Typical power consumption	1.9W
Operating temperature	0° C to 55° C
Storage temperature	-40° C to 70° C
LED Indicators	LINK/ACTIVITY LED: off=NO LINK; on=LINK; blinking=ACTIVITY SPEED LED: off=10 Mb; green=100 Mb; yellow=1000 Mb
Dimensions	11.92 x 5.53 x 12 cm (Length x Width x height of end bracket)
Accessories	Low-profile PCIe bracket included

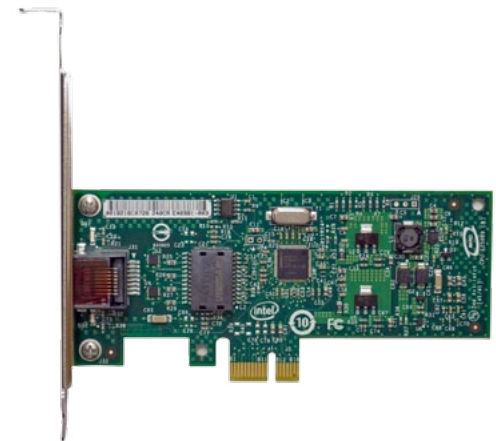

Power Supply with HR25 GPIO Connector

ACC-01-9009

General Specifications	
Length	115cm
Connectors	12 V power supply with international adapters Hirose HR25 8-pin male connector with strain relief
Input	100 - 240V
Power	12V 1.5A
Compliance	RoHS

