



## COMPACT MULTI-SENSOR GYRO-STABILIZED SURVEILLANCE SYSTEM

# FLIR UltraFORCE<sup>®</sup> 275-HD

Extremely low SWaP makes the UltraFORCE 275-HD the optimal choice for weight, power and footprint-constrained platforms. The system delivers multi-spectral HD imaging performance for airborne homeland security, combat, patrol, surveillance, reconnaissance, and search and rescue programs. Durable, long endurance design makes the UltraFORCE 275-HD the ideal choice for lightweight manned and unmanned airborne platforms. Built in Europe with no U.S.-sourced components, the system is non-ITAR and offers worldwide exportability and freedom of movement within Europe.

The UltraFORCE 275-HD delivers high-quality, real-time full motion video (FMV) while having the lowest weight in its 10" to 12" turret class. It incorporates high performance TV and IR imaging payloads, both with continuous zoom optics, to provide long-range identification and covert operation at high standoff ranges. Single LRU architecture simplifies installation, and integrated IMU and GPS provide accurate geo-referencing for peripheral systems.

### FEATURES

#### SIGNIFICANT SWaP ADVANTAGES

Single LRU and lowest weight in its 10" to 12" turret class make it easy to install on weight, power, and footprint-constrained platforms, without compromising endurance.

#### NON-ITAR FLEXIBILITY

Built in Europe with no U.S.-sourced components, the UltraFORCE family has broad worldwide exportability.

#### CONTINUOUS ZOOM

Continuous zoom, high performance optics on all imaging sensors provide uninterrupted video of evidential quality and reduces operator workload to maintain target visibility during zoom.

#### EASA FORM 1 COMPLIANT

This certificate of airworthiness simplifies installation and certification, and eliminates the need for qualification when installed on approved aircraft mounts.

#### RICH METADATA OUTPUT

UltraFORCE 275-HD delivers full HD video with embedded metadata fully compliant to STANAG and MISB standards.

### APPLICATIONS

COUNTER DRUG AND PEOPLE SMUGGLING

HOMELAND SECURITY

PATROL

SURVEILLANCE


RECONNAISSANCE

SEARCH & RESCUE

BORDER PROTECTION

## SPECIFICATIONS

Thermal Imaging Performance	
Sensor Type	3rd gen 640 x 512 3-5 $\mu\text{m}$ MCT focal plane array
Image Enhancements	Non Uniformity Correction, Bad Pixel Replacement, AGC (Automatic Gain Control), Histogram, Equalization, Digital Details Enhancement (Tunable)
FOV	Continuous zoom 28° to 1.83°
Ezoom	2x
Daylight Imaging Performance	
Sensor	High Definition CMOS
Resolution	1080 x 720
FOV	Continuous zoom 45° to 2.2°
Minimum Illumination	0.5 lux
Gimbal Specifications	
LOS Pan range	360 degrees continuous
LOS Tilt range	+20 / -120 degrees
AZ/EL slew rate	Up to 60°/s
Stow	Magnetically held in stow position
Electronics Control Unit	
Hand Controller Unit	0.8 kg, 230 mm Height
Interfaces	
ARINC 429, RS232/422 and other interfaces to support navigation systems, moving maps, radars, searchlights, and GPS	
Outputs	
Video	720P HD-SDI (all video channels)
Power	
Power requirements	22-30 VDC < 150 W
Overview	
Gimbal size	275 mm (D) x 378.5 mm (H)
Gimbal weight	15 kg
Environmental	RTCA DO-160E
Options	
Auto-Tracker Laser Range Finder Laser Pointer (Covert) Eyesafe Visible Laser Pointer Laser Illuminator IMU Control Unit	

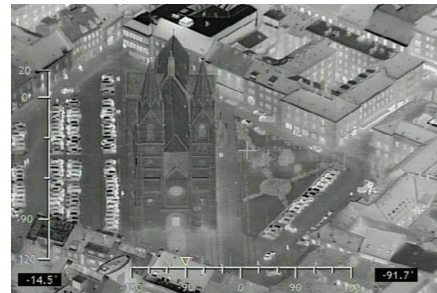

### AMERICAS

FLIR Systems, Inc.  
Corporate Headquarters  
27700 SW Parkway Ave  
Wilsonville, OR 97070  
Office: +1 877.773.3547

FLIR Systems, Inc.  
DC Headquarters  
1201 S. Joyce Street  
Suite C006  
Arlington, VA 22202  
Office: +1 703.682.3400

### EUROPE

FLIR Systems  
2 Kings Hill Avenue - Kings Hill  
West Malling, Kent ME19 4AQ  
United Kingdom  
Office: +44 (0)1732 220 011  
Fax: +44 (0)1732 843 707

FLIR Systems AB  
Antennvägen 6,  
PO Box 737  
SE-187 66 Täby  
Sweden  
Office: +46 (0)8 753 25 00

### MIDDLE EAST

FLIR Systems B.V. - Abu Dhabi  
Wadi Al Fey St.  
Building 60, Office # 302  
New Ministries Exit / Khalifa Park Area  
Abu Dhabi, U.A.E.  
Office: +971 2 666 1561  
e-Fax: +1 503 914 1591

FLIR Systems Saudi Arabia  
Office 127, First Floor  
Akaria Plaza Building, Olaya Street  
Riyadh, 11481, Saudi Arabia  
Office: +966 11 464 5323  
Fax: +966 11 464 0438

### ASIA

FLIR Systems Japan K.K.  
Meguro Tokyo Bldg. 5F,  
2-13-17  
Kami-Osaki, Shinagawa-ku.  
Tokyo, 141-0021, Japan  
Office: +81-3-6721-6648

For More Information contact  
surveillance\_sales@flir.com

www.flir.com  
NASDAQ: FLIR

Equipment described herein pertains to a European Union origin product that is controlled as dual-use item by the European Union government. It may be subject to US Jurisdictions when in the United States or possessed by a US person and may require authorization to re-transfer to or share with a foreign person (not a US Person). Imagery for illustration purposes only. Specifications are subject to change without notice. ©2019 FLIR Systems, Inc. All rights reserved. Revised 08/13/19

19-0527-SUR UltraFORCE 275-HD SS A4



The World's Sixth Sense®