



## CONTINUOUS ZOOM LWIR IMAGING

# FLIR StormCaster-T

The FLIR StormCaster-T continuous zoom LWIR payload supports detection, recognition, identification and target acquisition day or night, with maximum range and time on station. It's continuous zoom lens permits long distance ISR while providing sharp, clear actionable imagery in support of the mission.

As a member of our next generation payload family, the StormCaster-T reflects a significant leap ahead in scalable payload performance offering a 7x improvement in line of sight stabilization, enhanced range of motion and a dramatically increased geolocation accuracy - all in a rugged, low SWaP-C package.

The modularity of the StormCaster payload family facilitates interoperability and rapid interchange of payloads across SkyRanger R70 and R80D SkyRaider platforms while leveraging continuously evolving aircraft performance, intelligence and set of available accessories.

## FEATURES

### CONTINUOUS ZOOM IR AND SUPERIOR STABILIZATION PERFORMANCE

Industry leading detection, recognition and identification ranges.

### RICH AND EXPANDING FEATURE SET

With multiple embedded NVIDIA TX2 processors, the R70/R80D is a flying supercomputer with an engine for real-time AI at the network edge, including object detection and classification and support for AI development with third-party vendors.

## APPLICATIONS

IMMEDIATE ISR

CLANDESTINE OPERATIONS

TARGETING

SITUATIONAL AWARENESS

EVENT OVERWATCH

FORCE PROTECTION


ADVANCED TARGET RECOGNITION

BORDER SECURITY


CRITICAL INFRASTRUCTURE PROTECTION

## SPECIFICATIONS

Thermal Imager	
Sensor	FLIR Boson, 12µm, 60Hz
Resolution	640 x 512
Fields of View	31° to 6° optical continuous zoom 2° with digital zoom
Gimbal	
Line-of-sight Stabilization	< 0.3 mRad
Stabilization	3 axis (pitch, roll, yaw)
Vibration Isolation	6 axis passive on aircraft
Controllable Ranges of Motion	
Roll	+/- 0 degrees
Pitch	+20/-90 degrees
Yaw	+/- 180 degrees
Slew Rate	
	60 deg/s
Weight	
	1.0 Kg (2.2 lbs)
Dimensions	
	196mm (W) x 159 (L) x 223mm (H) 7.7" (W) x 6.2" (L) x 8.7"(H)
Operating Temperature	
	-20° C to 45° C (-4° F to 113° F)
Additional System Features	
	Geo-pointing User Defined Object Tracking Moving Target Indication Digital Image Stabilization Target Coordinates, Heading, Speed AI-based People/Vehicle Detection & Classification (Q2 2020)

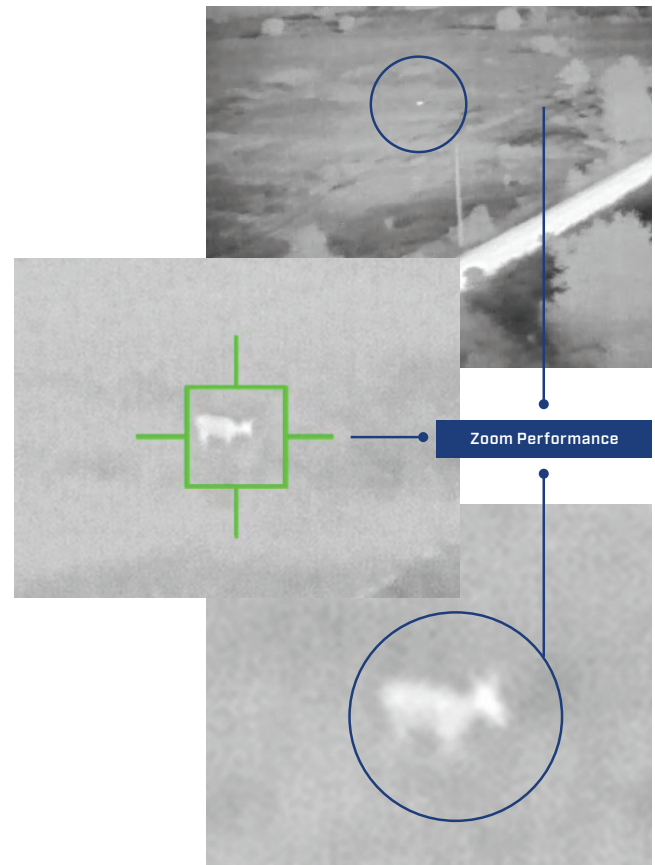

*Zoom Performance:  
Comparative Imagery for  
15mm to 75mm continuous zoom*

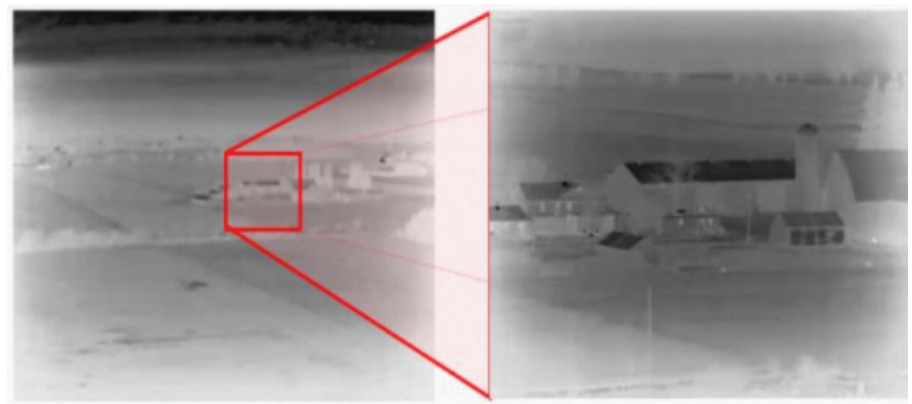

### AMERICAS

FLIR Systems, Inc.  
Corporate Headquarters  
27700 SW Parkway Ave  
Wilsonville, OR 97070  
Office: +1 877.773.3547

FLIR Systems, Inc.  
DC Headquarters  
1201 S. Joyce Street  
Suite C006  
Arlington, VA 22202  
Office: +1 703.682.3400

FLIR Systems, Inc.  
7055 Troy Hill Dr. Suite 300  
Elkridge, MD 21075  
Office: + 1 877.692.2120

FLIR Systems, Inc.  
575 Kumpf Dr.  
Waterloo, ON N2V 1K3, Canada  
Office: +1 519.489.6726

FLIR Systems, Inc.  
1001 17th St #680  
Denver, CO 80202  
Office: +1 720.442.7410

### EUROPE

FLIR Systems  
2 Kings Hill Avenue - Kings Hill  
West Malling, Kent ME19 4AQ  
United Kingdom  
Office: +44 (0)1732 220 011  
Fax: +44 (0)1732 843 707

### MIDDLE EAST

FLIR Systems B.V. - Abu Dhabi  
Wadi Al Fey St.  
Building 60, Office # 302  
New Ministries Exit / Khalifa Park Area  
Abu Dhabi, U.A.E.  
Office: +971 2 666 1561  
e-Fax: +1 503 914 1591

FLIR Systems Saudi Arabia  
Office 127, First Floor  
Akaria Plaza Building, Olaya Street  
Riyadh, 11481, Saudi Arabia  
Office: +966 11 464 5323  
Fax: +966 11 464 0438

### ASIA

FLIR Systems Japan K.K.  
Meguro Tokyu Bldg. 5F, 2-13-17  
Kami-Osaki, Shinagawa-ku.  
Tokyo, 141-0021, Japan  
Office: +81-3-6721-6648

For More Information contact  
surveillance\_sales@flir.com

www.flir.com  
NASDAQ: FLIR

Imagery for illustration purposes  
only. Specifications are subject to  
change without notice. ©2019  
FLIR Systems, Inc. All rights  
reserved. 10/09/19

19-2125-UIS StormCaster T Payload  
Specsheet LTR



The World's Sixth Sense®