



VEHICLE PRESENCE SENSOR

TrafiCam x-stream2

The FLIR TrafiCam x-stream2 combines a digital camera and video detector into a single vehicle presence sensor. Detecting moving and stationary vehicles at signalized intersections, TrafiCam x-stream2 transmits vehicle presence information to a traffic controller via detection outputs or TCP/IP communication for adaptive and responsive signal timing. Each cost-effective TrafiCam x-stream2 sensor helps reduce vehicle idling time and optimize traffic flow.

www.flir.com/Traffic



VEHICLE DETECTION

Dynamic control of traffic signals by detecting vehicles 24/7, over multiple lanes and any direction


- Adapt signal times according to actual demand and optimize traffic flow
- Traffic data collection, queue detection and traffic flow monitoring



TRAFFIC MONITORING

Real-time verification and monitoring with video streaming capabilities

- Local & remote configuration
- Position vehicle presence and traffic data zones
- Live viewing

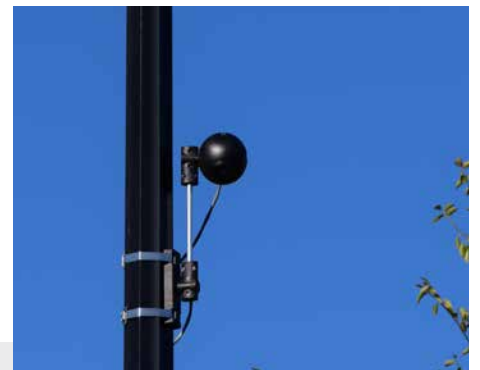

EASY-TO-INSTALL

Mounting onto existing infrastructure and quick integration with various system architectures

- Non-intrusive, above ground installation
- Broadband over powerline communication technology
- Detection contact outputs and TCP/IP data communication (public API available)

TECHNICAL SPECIFICATIONS

System Overview			
Functionalities	Vehicle Presence Detection Traffic Data Collection		
Detection zones	24 vehicle presence detection zones 8 traffic data zones (also for traffic flow monitoring)		
Configuration	Web page setup		
Camera			
Type	CMOS 1/4" color		
Resolution	VGA (640 × 480)		
Frame Rate	25 fps		
Compression	H.264, MPEG-4, MJPEG		
Streaming Video	RTSP		
Product Types			
	Part Number	Focal Distance	Detection Distance for Vehicle Presence
TrafiCam x-stream2 Wide	10-7150	2.1 mm	0-25 m / 0-85 ft
TrafiCam x-stream2 Narrow	10-7151	6.0 mm	15-75 m / 50-250 ft
Housing			
Material	Aluminum housing with integrated polycarbonate sun shield		
Dimensions (incl. mounting bracket)	Vertically mounted: 45 cm × 16 cm × 12 cm / 9.8 in × 6.3 in × 4.7 in Horizontally mounted: 41 cm × 18 cm × 12 cm / 16.2 in × 7.1 in × 4.7 in		
Power, outputs, communications			
Input power	24-42 VAC / 24-48 VDC		
Power consumption	Avg 6 W / Peak 9 W		
Output contacts	1 N/O and 1 N/C dry contact direct 16 N/C dry contacts via TI BPL2 interface 4 N/C dry contacts via TI BPL2 EDGE interface (more with additional 4 I/O USB expansion boards) SDLC to traffic light controller via TI BPL2 EDGE interface and PIM module		
PoE	PoE mode A for configuration, video streaming and data		
BPL	80 Mbps Broadband over Powerline communication via TI BPL2 or TI BPL2 Edge interface		
Environmental			
Shock & Vibration	NEMA TS2 specs		
Materials	All weatherproof UV		
IP Rating	IP 67		
Temperature Range	-34°C to +74°C / -29°F to +165°F		
Regulatory			
FCC / EU Directives	FCC part 15 class A, EMC 2014/30/EU RoHS 2011/65/EU, LVD 2014/35/EU		

Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 877.773.3547

FLIR ITS
Hospitaalweg 1B
B-8510 Marke
Belgium
PH: +32 (0)56 37 22 00

www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. (01/20)

20-0149-ITS-EMEA



The World's Sixth Sense®